



2.2.7 Dust Proof Accessories

(1) Codes of accessories


If the following accessories are needed, please add the code followed by the model number.

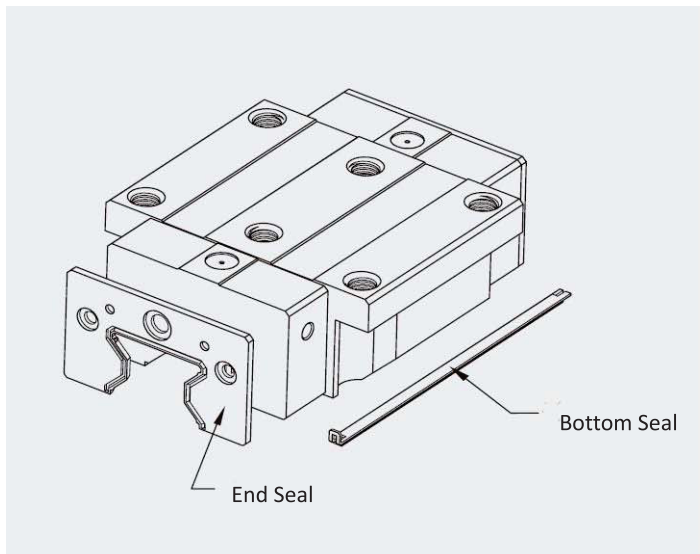

UU: End Seal+Bottom Seal

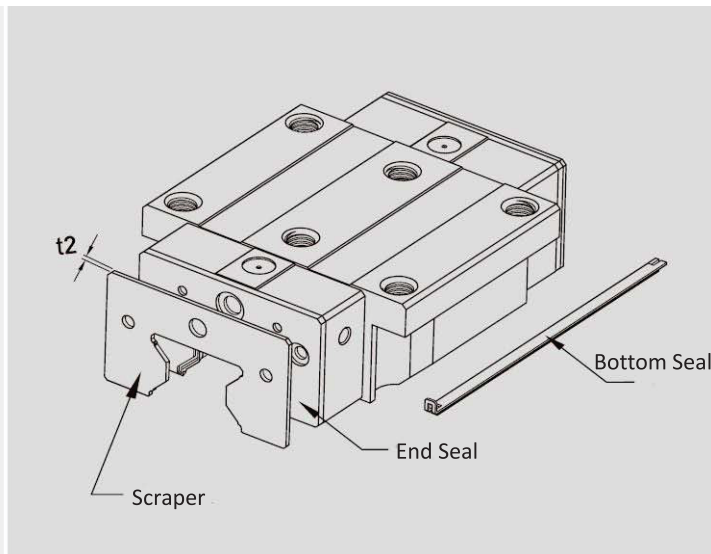

SS: Scraper+End Seal+Bottom Seal

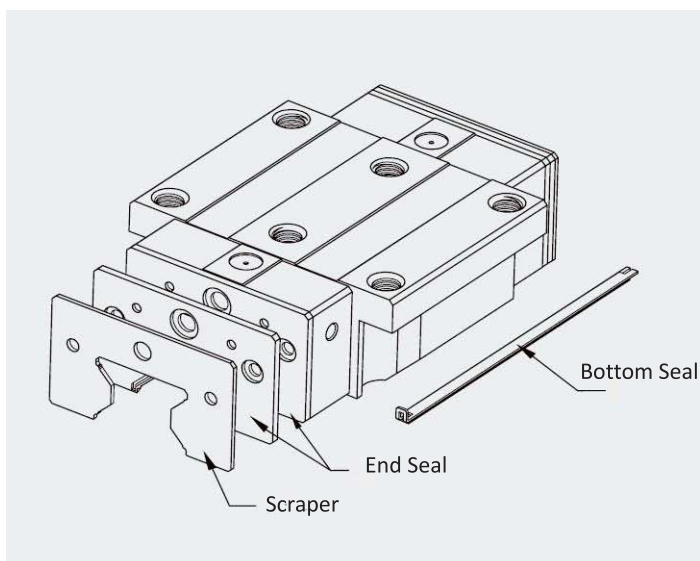

KK: Scraper+Double End Seal+Bottom Seal

(2) End seal and bottom seal

To prevent life reduction caused by iron chips or dust entering the block.

(3) Double seals

Enhances the wiping effect, foreign matter can be completely wiped off.

unit: mm

Size	Thickness(t1)	Size	Thickness(t1)
MSZ15	2.2	MSZ35	2.5
MSZ20	2.2	MSZ45	3.6
MSZ25	2.2	MSZ55	3.6
MSZ30	2.4	MSZ65	4.4

Table 2-2-14 Dimensions of end seal

(4) Scraper


The scraper removes high-temperature iron chips and larger foreign objects.

unit: mm

Size	Thickness(t1)	Size	Thickness(t1)
MSZ15	1.5	MSZ35	1.5
MSZ20	1.5	MSZ45	1.5
MSZ25	1.5	MSZ55	1.5
MSZ30	1.5	MSZ65	1.5

Table 2-2-15 Dimensions of scraper

- (5) Bolt caps for rail mounting holes Caps are used to cover the mounting holes to prevent chips or other foreign objects from collecting in the holes. The caps will be enclosed in each rail package.

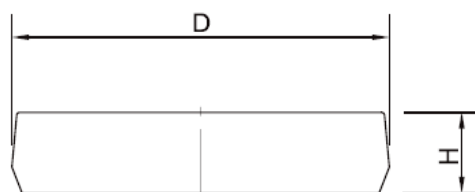

unit: mm

Rail size	Bolt size	Diameter(D)	Thickness(H)	Rail size	Bolt size	Diameter(D)	Thickness(H)
MSZ-R15	M4	7.65	1.1	MSZ-R35	M8	14.2	3.5
MSZ-R20	M5	9.65	2.5	MSZ-R45	M12	20.25	4.5
MSZ-R25	M6	11.15	2.5	MSZ-R55	M14	23.25	5.0
MSZ-R30	M8	14.2	3.5	MSZ-R65	M16	26.35	5.0

Table 2-2-16 Dimensions of Bolt Caps for Rail Mounting Holes